

DESCRIPTION

The **GEFCO Select #PE109-SST Series Slab Penetrations** provide cast in place, waterproof stub-ups for piping entering the fountain basin. A water stop flange placed in the center of the slab penetration serves as both a leak proof device to prevent water migrating along the outer edges of the pipe, and as a means for keeping the pipe in place and rigid once the concrete has cured.

The GEFCO #PE109-SST Series Slab Penetration are available only in Stainless Steel. See GEFCO # PE109-XX-BRS for the brass version. Penetrations are supplied with grounding screws for placement and connection of the code required #8 bond wire and grounding clamp (supplied by E.C.)

When specifying, please use the following suffix to ensure the proper size pipe connection fitting is provided:

GEFCO Select #PE109-XX-SST


Where XX is:

- 05 1/2" NPT Connection.
- 07 3/4" NPT Connection.
- 10 1" NPT Connection.
- 12 1-1/4" NPT Connection.
- 15 1-1/2" NPT Connection.
- 20 2" NPT Connection.
- 30 3" NPT Connection.
- 40 4" NPT Connection.
- 60 6" dia. copper tubing.

TYPICAL SPECIFICATIONS:

* **GEFCO #PE109-XX-SST Slab Penetration:**

- SST water stop flange.
- XX" NPT SST Connection (specify)
- #10-24 SST bonding screw.

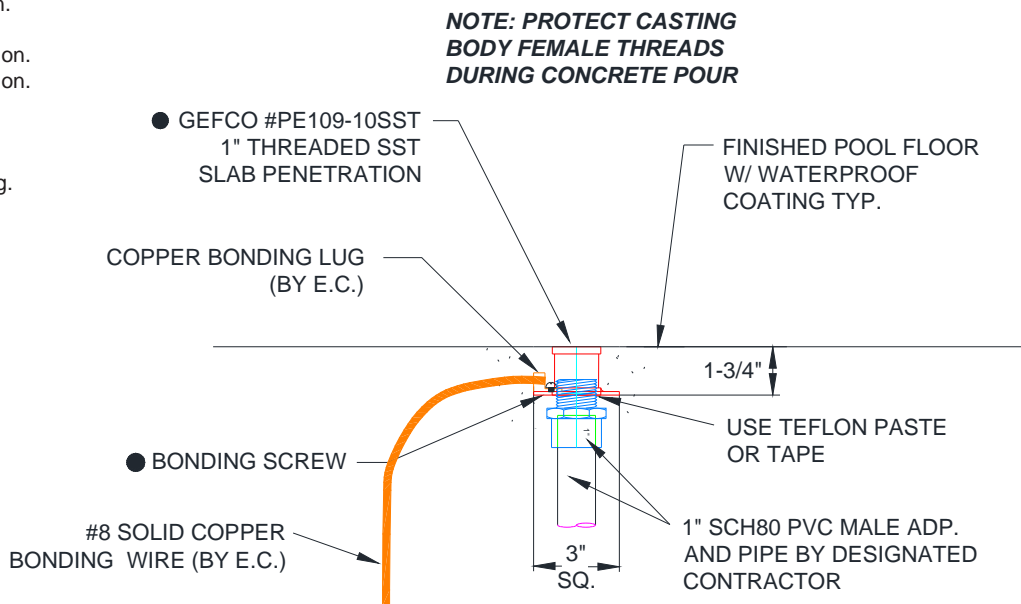

GEFCO #PE109-10SST SHOWN

IMPORTANT

*Dimensions and/or Materials
subject to change without notice*