

DESCRIPTION:


The **GEFCO Select #SE01050 Flow Straightener** is typically used in ornamental fountains and are finished units that allow the decorative presentation of a stream of water with a better than average stream quality containing some exceptional cohesion of the water presented. A minimum debris strainer size of 3/16" is recommended on systems for most pipe sizes (see table below).

TYPICAL SPECIFICATIONS:

- * **GEFCO Select #SE01050-X Flow Straightener:**
- made of machined brass.
- XX" NPT Inlet connection (specify - see table).
- XX GPM flow (specify - see table).
- flow insert.
- SST set screw.

Replacement Parts:

- NONE

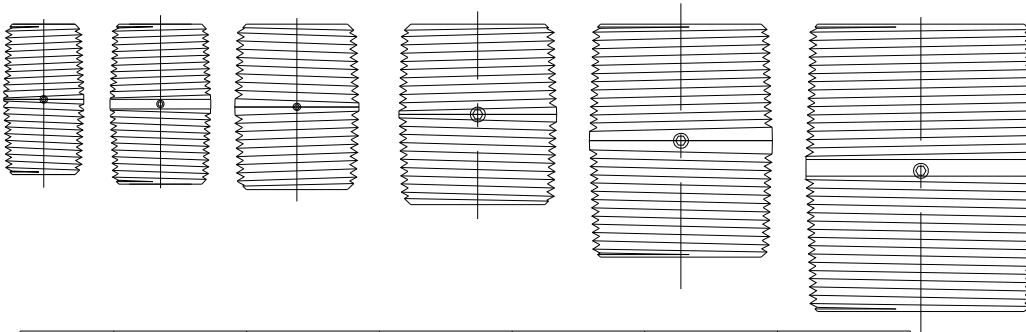

#SE01050	-05	-07	-10	-12	-15	-20
T	1/2" NPT	3/4" NPT	1" NPT	1 1/4" NPT	1-1/2" NPT	2" NPT
OV	1-3/16"	1-1/2"	1 5/8"	1 5/8"	1 3/4"	2 1/8"
FL	18 GPM	45 GPM	60 GPM	80 GPM	106 GPM	120 GPM
△ P	9.3' TDH	9.3' TDH	8.3' TDH	7.3' TDH	6.6' TDH	6.6' TDH
SS	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"

IMPORTANT REQUIREMENT

Designers and Engineers shall be responsible for the accuracy of system flow rates and especially system head loss requirements. Stated flows and head pressure requirements for any listed spray height are required AT THE NOZZLE. Extrapolations for unlisted spray heights are at the sole responsibility of the Designers and/or Engineers.

IMPORTANT

Dimensions, Manufacturers and/or Materials subject to change without notice