

**DESCRIPTION**

The **GEFCO Select #SE123-Series Ring Cluster Sprayhead** provides a ring of jets spraying up and slightly out. The spray effect is that of fine, and lacy jets of water creating an outside dropping ring of sprays.

A GEFCO Select #SE137-Series Adjustment Flange is designed to correct the vertical adjustment of sprays up to 5 degrees off of vertical, for larger adjustment use a GEFCO Select #SE138-Series Swivel Union (both #SE137-Series and #SE138-Series can be ordered separately).


The GEFCO #SE123 Ring Cluster Jet can be installed on a GEFCO #PE109-Series Slab Penetration which will provide a rigid non-corrosive, waterproofing penetration. The Jet can also be mounted on a spray pod, spray ring, spray bar or a spray arc.

**TYPICAL SPECIFICATIONS:**

- \* **GEFCO Select #SE123** Ring Cluster Sprayhead:
- made of cast bronze and brass fitted.
- 5° from vertical center line, outside drop
- 3/4" N.P.T. female connection.

**ADDITIONAL INFORMATION:**

- \* **MAX. Suction straining to be: 0.040"**
- \* **100% filtered water is recommended.**

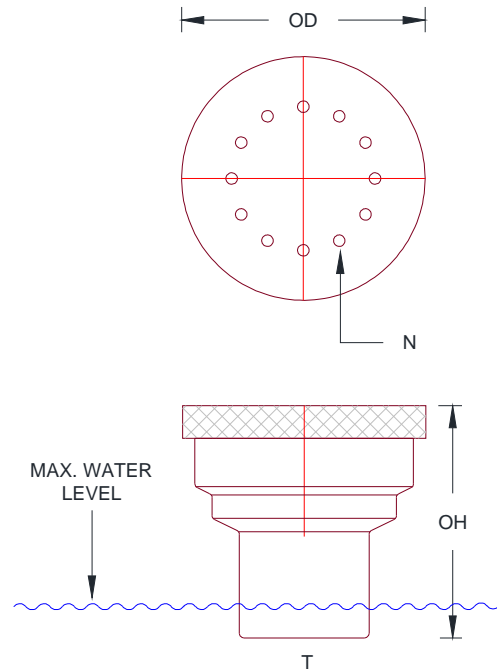

DIMENSIONS:	
T	3/4"
OH	2.360"
OD	2.760"
N	12
OS	.094"

PERFORMANCES:			
SH	SD	GPM	FH
4'	2'	10	6'
5'	3'	12	7'
6'	4'	14	8'
8'	5'	18	11'
10'	6'	22	16'

**IMPORTANT REQUIREMENT**

*Designers and Engineers shall be responsible for the accuracy of system flow rates and especially system head loss requirements. Stated flows and head pressure requirements for any listed spray height are required AT THE NOZZLE. Extrapolations for unlisted spray heights are at the sole responsibility of the Designers and/or Engineers.*

**IMPORTANT**

*Dimensions, Manufacturers and/or Materials subject to change without notice*