

DESCRIPTION

The **GEFCO #PE113-1-SP PVC Floor Mounted Float Valve** provides cold water hookup directly into the pool basin. The fitting is provided with a PVC tube enclosure that is mounted on a copper slab penetration (see GEFCO #PE109 series). Water enters the float valve through drilled inlets as the float valve allows water to enter the pool while preventing potential vandalism or destruction of the valve. Once installed, the water level adjustment may be made in order to ensure proper operation.

The float valve is provided with a 1/2" connection to attach to a GEFCO #PE109-05 slab penetration (order separately).

It is not recommended that this fitting be used in fountains with more than one level.


IMPORTANT NOTE:

- *This device requires a suitable backflow device (provided by others).*
- *A winter drain and by-pass valve (by others) in the system to drain and expedite filling is recommended.*
- *Max. water pressure shall be limited to 50PSI.*

TYPICAL SPECIFICATIONS:

*** GEFCO #PE113-1-SP PVC Floor Mounted Float Enclosed Fill Valve:**

- constructed of 4" PVC Material.
- removable PVC cap for servicing.
- circular outflow openings.
- float valve made of DELRIN plastic.
- stainless steel fastened.
- 1/2" female NPT connection.
- *Max. water pressure to be limited to 50 psi.*

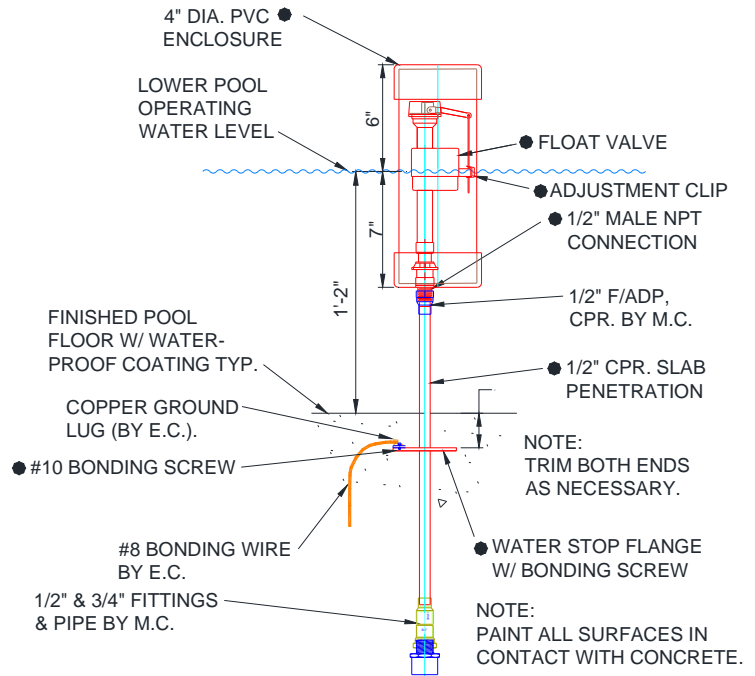

IMPORTANT

Dimensions and/or Materials subject to change without notice