

DESCRIPTION

The **GEFCO Select #SE134-15 Filigran Spray Jet** is designed to provide a multi-stream spray of approximately 5" width, that in its lower spray heights gives a filigran type effect, especially within an angle pattern, where the spray 'folds' over itself, actually crossing the streams. In the greater spray heights this jet in its greater width can give from one side the appearance of a large, full stream jet whilst only using a fraction of the flow. This jet can be adapted for salt water use.

A GEFCO Select #SE137-Series Adjustment Flange is designed to correct the vertical adjustment of sprays up to 5 degrees off of vertical, for larger adjustment use a GEFCO Select #SE138-Series Swivel Union (both #SE137-Series and #SE138-Series can be ordered separately).



The GEFCO Select #SE134-15 Filigran Spray Jet can be installed on a GEFCO #PE109-Series Slab Penetration which will provide a rigid non-corrosive, waterproofing penetration. The Jet can also be mounted on a spray pod, spray ring, spray bar or a spray arc.

TYPICAL SPECIFICATIONS:

- * **GEFCO Select #SE134** Filigran Spray Jet:
 - made of cast bronze, brass fitted.
 - 7 ea. 0.250" orifice jets
 - 1-1/2" NPT female connection.

ADDITIONAL INFORMATION:

- 100 % Filtered water recommended
- Suction Straining required to be: **MAX. 0.187"**.

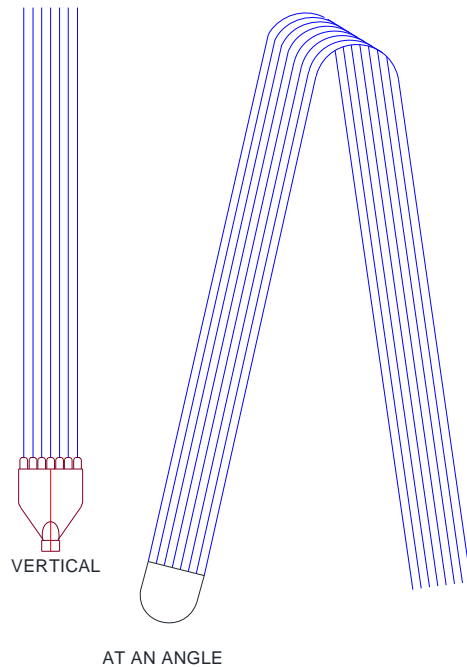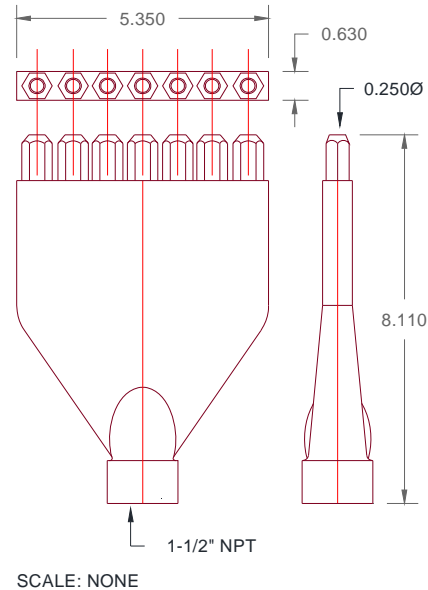

| VERTICAL PERFORMANCES: in Ft. | | |
|-------------------------------|-----|----|
| SH | GPM | FH |
| 3 | 19 | 4 |
| 5 | 26 | 6 |
| 8 | 31 | 10 |
| 10 | 35 | 12 |
| 15 | 41 | 18 |
| 20 | 47 | 24 |

IMPORTANT REQUIREMENT

Designers and Engineers shall be responsible for the accuracy of system flow rates and especially system head loss requirements. Stated flows and head pressure requirements for any listed spray height are required AT THE NOZZLE. Extrapolations for unlisted spray heights are at the sole responsibility of the Designers and/or Engineers.

IMPORTANT

Dimensions, Manufacturers and/or Materials subject to change without notice