

DESCRIPTION

The **GEFCO Select #EE153NC Niche Mounted LED Wet/Dry Light Fixture** is constructed to provide relative narrow dispersion of light and provides an excellent solid color rendition for low range height spray effects or low waterfalls. The fixture can also be equipped with RGB or RGBW DMX controlled Lighting Systems (see GEFCO #EE153NDMX). They can also be mounted in a slab hung or free standing version (see GEFCO #EE153 Series). The light has a projection beam angle of up to 10°. It is equipped with a clear machined flat polycarbonate lens.

Limits for this fixture is 11 Watts MAX. at 12-15 VAC or 24VDC. These fixtures are to be connected to common commercially available 12-14VAC U.L. Listed Swimming Pool Transformers or CLASS II 12VDC or 24VDC Power Supplies (sold separately). Connections are made to standard U.L. Listed underwater deck junction boxes such as GEFCO Select #EE138 Series using U.L. Listed cord seals such as GEFCO Select #EE137 Series Cord Seals. **Operating in DRY condition** is OK.

TYPICAL SPECIFICATIONS:

*** GEFCO Select #EE153NC COLOR LED-XX-YY Niche Mounted Wet/Dry Light Fixture:**



- machined brass housing, SST fitted.
- machined brass niche housing.
- optional 1/2" NPT drain fitting.
- U.L. Listed: 11 watt, 12-14VAC or 24VDC MAX.
- XX color board (specify).
- YY = lens angle (specify).
- 15 feet of (18/3) single cable (specify).
- clear machined flat polycarbonate lens.
- silicon lens gaskets.
- bronze and brass ring pod stand
- rated IP68 to 30CM, for use in wet or dry conditions.
- **12VAC, 12VDC, 24VDC POWER SUPPLY NOT INCLUDED.**

OPTIONAL ITEMS:

- YY = Beam angles, available are 7 or 10° (specify)
- CORD LENGTH - Cable longer than 15'- 0" is optional and can be supplied at an extra cost, however, only 10'- 0" of exposed cable is permissible per NEC.

IMPORTANT

The designers, installers and end users utilizing the electrical equipment described herein assume full responsibility for the compliance with the N.E.C. and it's applicable articles, intents and consequences. Where the manufacturer and/or the supplier of the electrical equipment described herein does not control the application or usage, he assumes no responsibility whatsoever for any consequences arising out of the application, installation and/or usage of this or any other equipment and/or materials.

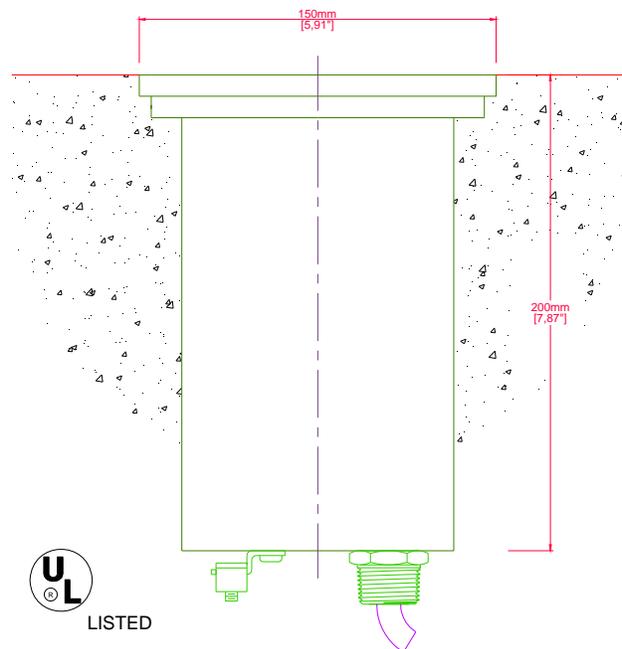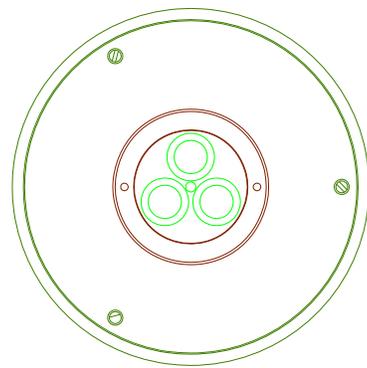

NICHE MOUNTED VERSION
SCALE: NONE

IMPORTANT

*Dimensions and/or Materials
subject to change without notice*