

**DESCRIPTION**

The **GEFCO Select #PE112 Adjustable Inlet Fitting** is used as a floor mounted inlet for small amounts of water in small or shallow pools.

A base of bronze with integral water stop flange is to be embedded into pool floor. The base possesses a 2" NPT connection at the pipe end and a 2" NPS at the companion flange end. An adjustable inlet cap regulates amount of water flowing through the fitting and forces the flow along the bottom of the pool reducing or eliminating surface disturbance.

One fitting will accommodate approximately 15-20 GPM. This fitting may be used as filling or filter return inlet where wall limitations will not allow GEFCO Select #PE102 Eyeball Fittings.

**IMPORTANT**


*Dimensions and/or Materials subject to change without notice*

**TYPICAL SPECIFICATIONS:**

- \* **GEFCO Select #PE112 Adjustable Inlet Fitting:**
- cast bronze body with integral water stop flange.
- chrome plated adjustable slotted brass deflection head.
- chrome plated companion flange, 2" x 1-1/2" NPS
- bonding screw.
- 2" female NPS / NPT base connection.

**REPLACEMENT PARTS:**

- 1 Inlet insert.
- 2 Companion flange.

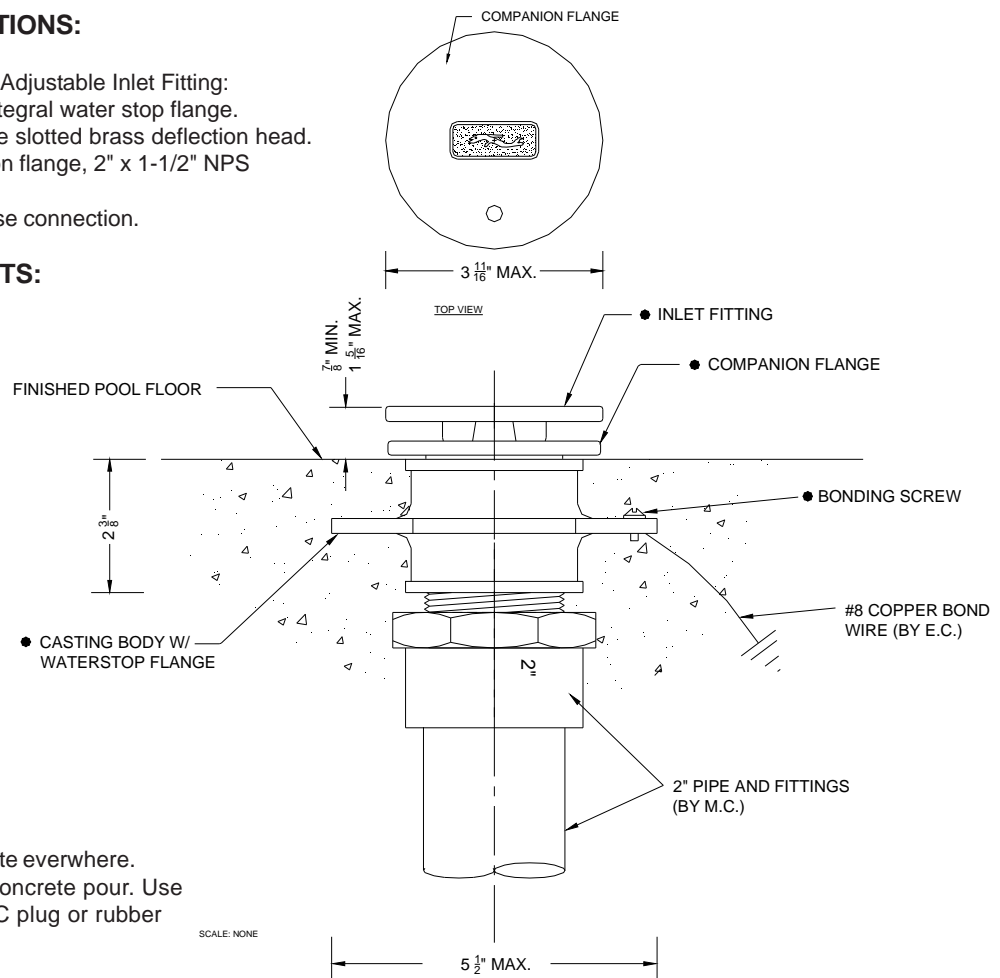

**IMPORTANT**

- use TEFLON tape or paste everywhere.
- protect threads during concrete pour. Use temporary threaded PVC plug or rubber pipe test plug

SCALE: NONE