

DESCRIPTION

The **GEFCO Select #PE113-1 Niche Mounted Float Valve** provides cold water hookup directly into the pool basin. The fitting is provided with tough Kydex niche that is to be embedded into the wall. A stainless steel face plate encloses the float valve and allows water to enter the pool while preventing potential vandalism or destruction of the valve. Once installed the water level adjustment may be made in order to ensure proper operation.


The float valve is provided with a 1/2" connection for smaller pools.

IMPORTANT NOTE:


- *This device requires a suitable backflow prevention to be provided by others.*
- *A winter drain and by-pass (by others) in the system to drain and expedite filling is recommended.*
- *Max. Water pressure to be limited to 50 PSI*

TYPICAL SPECIFICATIONS:

- * **GEFCO Select #PE113-1 Niche Mounted Float Valve:**
 - made of reinforced Kydex on niche, bronze, brass and SST fitted
 - cast bronze front frame.
 - stainless steel cover plate with circular or slotted outflow opening.
 - float valve made of DELRIN plastic.
 - stainless steel fastened.
 - 1/2" female NPT connection.

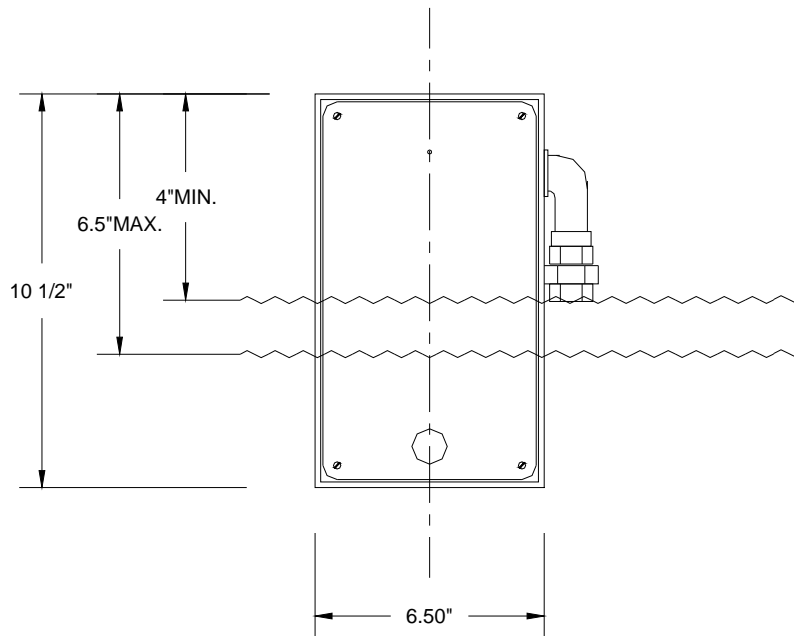

SCALE: NONE
DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

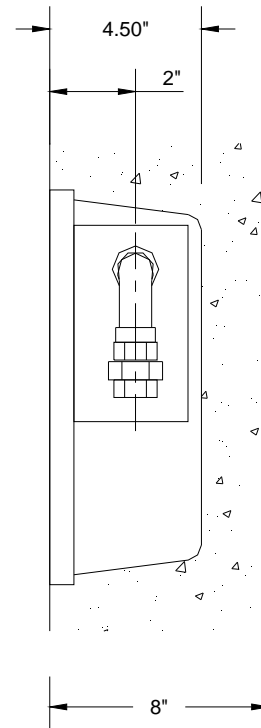

IMPORTANT
Dimensions and/or Materials
subject to change without notice