

**DESCRIPTION**

The **GEFCO #EE C133N LV Niche Mounted Submersible Light Fixture** is a very low profile 4 color in 1 submersible light providing medium dispersion of light and color changing rendition for low to medium height spray effects or waterfalls. The light fixture is provided with integral rock guard for installation with either wall or floor mounted applications. The adjust ability for light projection is at 15 degrees in any direction off of vertical. Clear lens is normally provided with 4 ea. optional MR 16 50W colored lamps. The light is also provided with copper housing and bronze grout frame. The maximum wattage is 4x50 Watts at 12 Volts .

Optional colors available are blue, red, green & yellow. Special order colors are available in dichroic colors.

**TYPICAL SPECIFICATIONS:**

\* **GEFCO Select #EE C133N** MR16 Submersible Niche Light Fixture:

- directional adjust ability.
- cast bronze with integral housing.
- water cooled.
- stainless steel fitted, housing and neoprene o-ring seal.
- rock guard integral with fixture.
- 3/4" male threaded connection.
- U.L. Listed.
- 4x 50 Watt, 12 V. max.
- 15 feet of 16/7 cable.
- clear tempered cast boron silicate lens.
- lamp required MR 16 specify colors .
- **LAMP NOT INCLUDED.**

**OPTIONAL ITEMS:**

120V Version: Available with GU-10 Connectors. Inquire at the Factory.

LAMP - The lamp is not ordinarily supplied, but can be upon request at additional cost. Please state voltage and wattage. Available are 50W and 65W dichroic.

CORD LENGTH - Cable longer than 15'- 0" is optional and can be supplied at an extra cost.

DRAIN - Fitting to be connected to a drain system in order to drain niche in the winter or for cleaning.

THERMAL CUT OFF - Specify (+07) for factory installation of thermal cut off inside fixture.

**IMPORTANT**


*Dimensions, Manufacturer and/or Materials subject to change without notice*

**REPLACEMENT PARTS**

- A Lens.
- B Lens gasket.
- C Base O-ring.
- D Face ring
- E Face ring ALLEN screw set.
- F Fixture mounting ALLEN screw set.

**IMPORTANT INFORMATION**


*The NEC Article 680-51(D) requires that "electric equipment which depends on submersion for safe operation shall be protected against overheating by a low water cutoff or by other approved means when not submerged." Other approved means are either GEFCO #EE115-Series or #EE140-Series water level control devices.*



10 5/8" **TOP VIEW**



**LISTED**

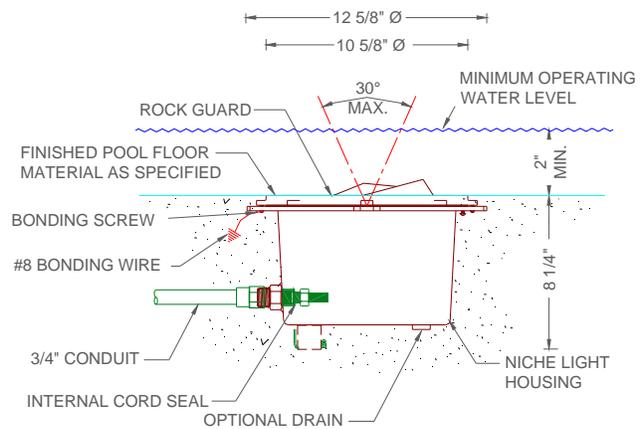

SCALE: NONE